




Scheuten® Solar Module

Multisol® Gold Line

P6-54



Characteristics of Multisol® P6-54 Gold Line at a glance

Multisol® P6-54 Gold is a new extension of the Multisol® range of high quality German made modules, designed and produced for a wide range of applications. Its aesthetics, high performance and high energy yield make it extremely suited for the residential segment. Based on over 20 years of experience Multisol® modules are characterized by their long service life, above average yield and excellent workmanship. The quality, output and reliability of Multisol® modules make them a solid investment for the future.

Multisol® P6-54 Gold is a new product in the Scheuten Solar range:

- Aesthetic design by using a black frame in combination with a black foil
- Improved energy yield thanks to f | solarfloat HT glass (quartz hard AR coating)
- High power by integrating high quality 3-bb cells

The performance of the Gold Line matches best-in-class in the industry. The module is equipped with our sturdy ProFix® black aluminum frame for easy mounting.

Multisol® P6-54 Gold is manufactured in Gelsenkirchen (Germany) on one the most modern module production lines in the world. This guarantees the highest quality available in the market of which leading warranty conditions are the result.

- Power range 210 – 220 Wp in 5 Wp steps
- Power tolerance +0 / +10 Wp
- Very rigid ProFix® black aluminium frame with hollow chamber
- IP67 rated Junction Box
- Environmentally friendly production according to ISO 14001
- Made in Germany
- Best-in-class power output warranty of 25 years with linear decline
- 10 year product warranty





Typical Data at Standard Test Conditions (STC)

| | | | | | |
|--|------------------|----------------------|------------|------------|-------------|
| Module Type P6-54 Gold Line | | | 210 | 215 | 220* |
| Nominal Peak Power | P _{mpp} | [Wp] | 210 | 215 | 220 |
| Power Tolerance + 0 / + 10 Wp | | | | | |
| Power density | | [Wp/m ²] | 140 | 143 | 147 |
| Peak Power Voltage | V _{mpp} | [V] | 27,3 | 27,4 | 27,6 |
| Peak Power Current | I _{mpp} | [A] | 7,70 | 7,85 | 7,97 |
| Open Circuit Voltage | V _{oc} | [V] | 33,3 | 33,5 | 33,6 |
| Short Circuit Current | I _{sc} | [A] | 8,17 | 8,30 | 8,44 |
| Module efficiency reduction @ 200 W/m ² | | | -0,8% Abs. | | |

STC: Standard Test Conditions; 1000 W/m², 25°C, AM 1,5

*limited available

Typical Data at Normal Operating Cell Temperature conditions (NOCT)

| | | | | | |
|-----------------------|------------------|------|------|------|------|
| T _{NOCT} | 44°C | | | | |
| Peak Power | P _{mpp} | [Wp] | 153 | 156 | 159 |
| Peak Power Voltage | V _{mpp} | [V] | 25,0 | 25,1 | 25,3 |
| Peak Power Current | I _{mpp} | [A] | 6,12 | 6,24 | 6,34 |
| Open Circuit Voltage | V _{oc} | [V] | 31,1 | 31,3 | 31,4 |
| Short Circuit Current | I _{sc} | [A] | 6,62 | 6,73 | 6,84 |

NOCT: Irradiance level 800 W/m², spectrum AM 1,5, wind velocity 1 m/s and ambient temperature 20°C

Thermal Characteristics

| | | | |
|--|---------------------|-------|-------|
| Temperature Coefficient I _{sc} | TK I _{sc} | 0,07 | [%/K] |
| Temperature Coefficient V _{oc} | TK V _{oc} | -0,34 | [%/K] |
| Temperature Coefficient P _{mpp} | TK P _{mpp} | -0,48 | [%/K] |

Measurement tolerances P_{mpp} @ STC ± 5% all other electrical parameters ± 10%

Tested Operating Conditions


| | |
|-------------|--|
| Temperature | -40°C to 85°C |
| Max Load | 5400 Pascal front and 2400 Pascal back |

Mechanical and System Design Data

| | |
|---|---|
| Dimensions H x W x D | 1500 x 1000 x 42 mm |
| Weight | 20 kg |
| Maximum system voltage | 1000 V |
| Limiting reverse current I _r | 15 A |
| Cells | 54 x 6" poly crystalline |
| Frame | ProFix® black aluminium frame with hollow chamber |
| Glass | 4 mm f solarfloat HT - highly transparent low-iron tempered safety glass AR coating |
| Junction Box | Universal Junction Box by Yamaichi, rated IP67 and 3 bypass diodes |
| Cabling | 2 x 4 mm ² cabling with MC-4 interchangeable connectors |

Warranty and Certifications

| | |
|--------------|--|
| Warranty | 25 year linear power warranty, 10 year product warranty For details see our Warranty conditions |
| Certificates | IEC 61215 ed.2, IEC 61730 Application Class A |

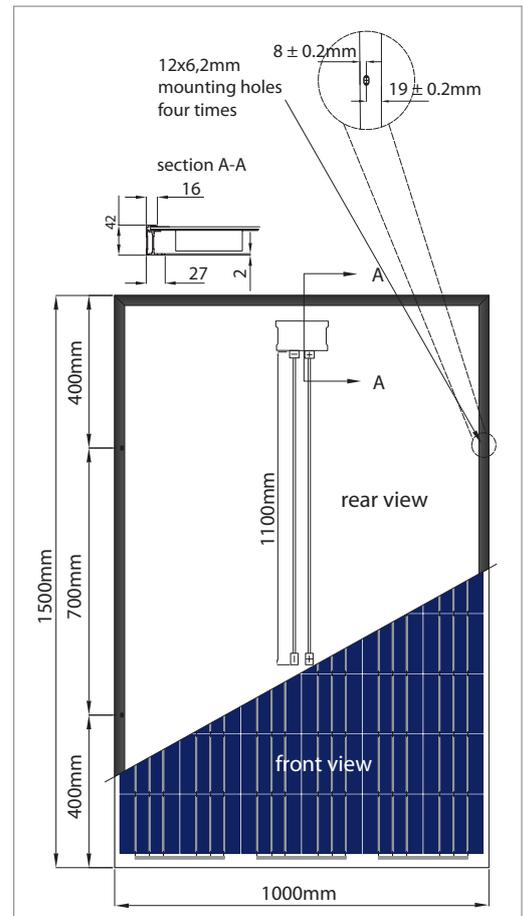

Scheuten Solar partner:
Company imprint

This datasheet is not legally binding. Actual specifications and/or product features may deviate.
Caution: Read Safety and Installation Instructions before using the Product. Visit our website for more details.